


NO NAME Universal Polymer Adhesive Tube

A versatile polymer adhesive for finishing and repair work. It is characterised by high adhesive strength and fast curing time. Once cured, it gives a flexible, colourless and age-resistant joint.

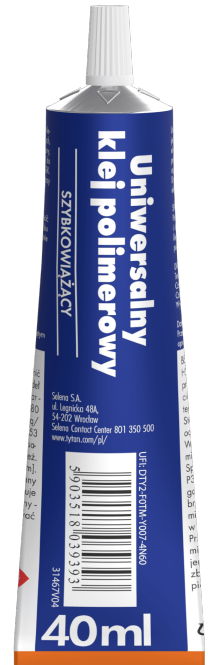

BENEFITS

- high final strength
- quick setting time
- flexible coating
- aging resistant joint

RECOMMENDED USES

- gluing polystyrene (coffers, radiator screens), wood and wood-based materials, glaze, ceramics, glass, cork, artificial leather and floor coverings

TABLES

TECHNICAL DATA

Coating appearance	not applicable
Viscosity	18000 – 30000 mPas 20 rpm, disk 5
Density	0,95 +/- 0,1
pH	not applicable
The number of layers	not applicable
Applying the second layer	not applicable
Total drying time	24 hours
Efficiency	0,9-1,1 l/m ²
Tools	brush, roller, spray
Expiration date	2 years
VOC limit	not applicable
Colors	colorless

METHOD OF USE

Before use, carefully read the directions on the packaging and act accordingly. Before starting the application, read the safety instructions in the MSDS.

Surface preparation

- The substrate must be even, dry, free from cracks and contamination.

Application

- Level the surfaces of the glued elements, clean, degrease and dry.
- Apply a thin layer of adhesive to the surface of both glued elements.
- After approx. 30 seconds, join the two surfaces together and press firmly.

Works after completion of application

- Do not dispose of with household waste, do not pour into sewage system.
- Waste should always be managed in accordance with the applicable national regulations on waste.

TRANSPORT / STORAGE

Storage temperature from +5°C to +25°C.

Store in a place inaccessible to children.

For detailed transport information, please refer to the Safety Data Sheet.

CATALOGUE DATA

Nominal capacity / volume / size	Colour	Number of pieces per collective package	Index	EAN Code
40 ml	N/A	nd.	10002916	5903518039393

SAFETY AND HEALTH PRECAUTIONS

Protect eyes and skin, in case of contact, rinse immediately with water.

Possible dirt should be removed without waiting for it to dry.

All written or oral information, recommendations and instructions are given according to our best knowledge, tests and experience, in good faith and in compliance with manufacturer's principles. Each user of this material will make sure in every possible way, including verification of the final product in proper conditions, about suitability of the supplied materials for their intended purposes. The manufacturer is not liable for any losses incurred due to inaccurate or erroneous application of the manufacturer's materials.