



**JOB  
WELL  
DONE.**



# Thermospray.

## EASY SPRAY INSULATION

Tytan Professional Thermospray thermal and acoustic spray foam is an insulation polyurethane foam designed to fill gaps and voids.

It is specifically designed for the insulation of internal and external building partition walls, hard to reach places, attics, metal garages, sheds, and other places traditional 2-component foam systems are used. Not compatible with all TYTAN gun applicators.

ASTM E96 | ASTM E283\* | ASTM D1622

[tytan.com/us](http://tytan.com/us)



Replace and/or repair 2-component foam systems\*



Yield at 1" depth



Sound blocking foam

**817-381-4427**



**JOB  
WELL  
DONE.**

# Getting Started with Tytan Professional Thermospray is Easy

## To Get Started:


1. Wear working clothes, gloves and eye protection.
2. Clean the surfaces of oil, dust, and grease.
3. Shake can vigorously for 30-45 seconds.




4. Remove protection cap.



5. Thread can clockwise onto gun applicator.

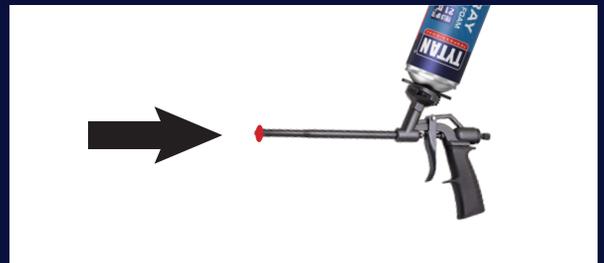

6. Apply spray nozzle to gun applicator.

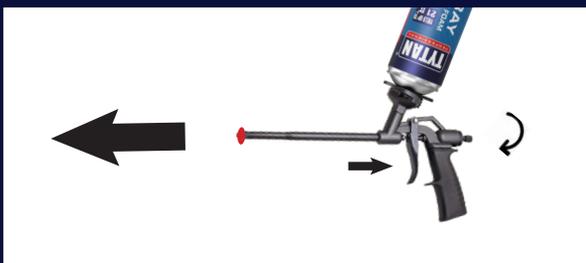

7. Set the spray nozzle to desired setting. Open valve and test spraying into a trash can by pulling the trigger.



8. Spray the foam from a distance of approximately 12" from the surface during application.